




Type: 4060-OP-C-C90

ARCHITECT SPECIFICATIONS

The lavalier microphone shall be a pre-polarized condenser type with an omnidirectional polar pattern. The effective frequency response shall be 20 Hz to 20 kHz within ± 2 dB from 20 Hz to 20 kHz. With a soft boost grid attached a 3 dB soft boost at 8 – 20 kHz shall be present and with a high boost grid a 10 dB boost at 12 kHz shall be present. The sensitivity shall be 20 mV/Pa (-34 dB re. 1V/Pa) at 1 kHz within a tolerance of ± 3 dB. The equivalent noise level shall be 23 dB(A). The microphone shall not exceed 1% THD at 132 dB SPL peak. The microphone shall have a dynamic range of 109 dB. The Max. SPL (10 % THD) shall be 134 dB SPL peak. The rated output impedance shall be 30 – 40 Ω and the connector type shall be MicroLock®. The cable length shall be 1.8 m with a cable diameter of 1.6 mm and in brown color. The microphone diameter shall be 5.4 mm (0.21 in) and the length 12.7 mm (0.5 in). The microphone shall have detachable caps and the microphone shall be protected against water and dust to an IP58 rating. The operating temperature shall range from -40°C to 45°C (-40°F to 113°F) and the microphone shall function in humidity levels up to 90%. The polarity of the signal on the center pin shall be positive going for a positively increasing sound pressure.

The microphone shall be the DPA 4060 Omnidirectional Microphone type 4060-OP-C-C90

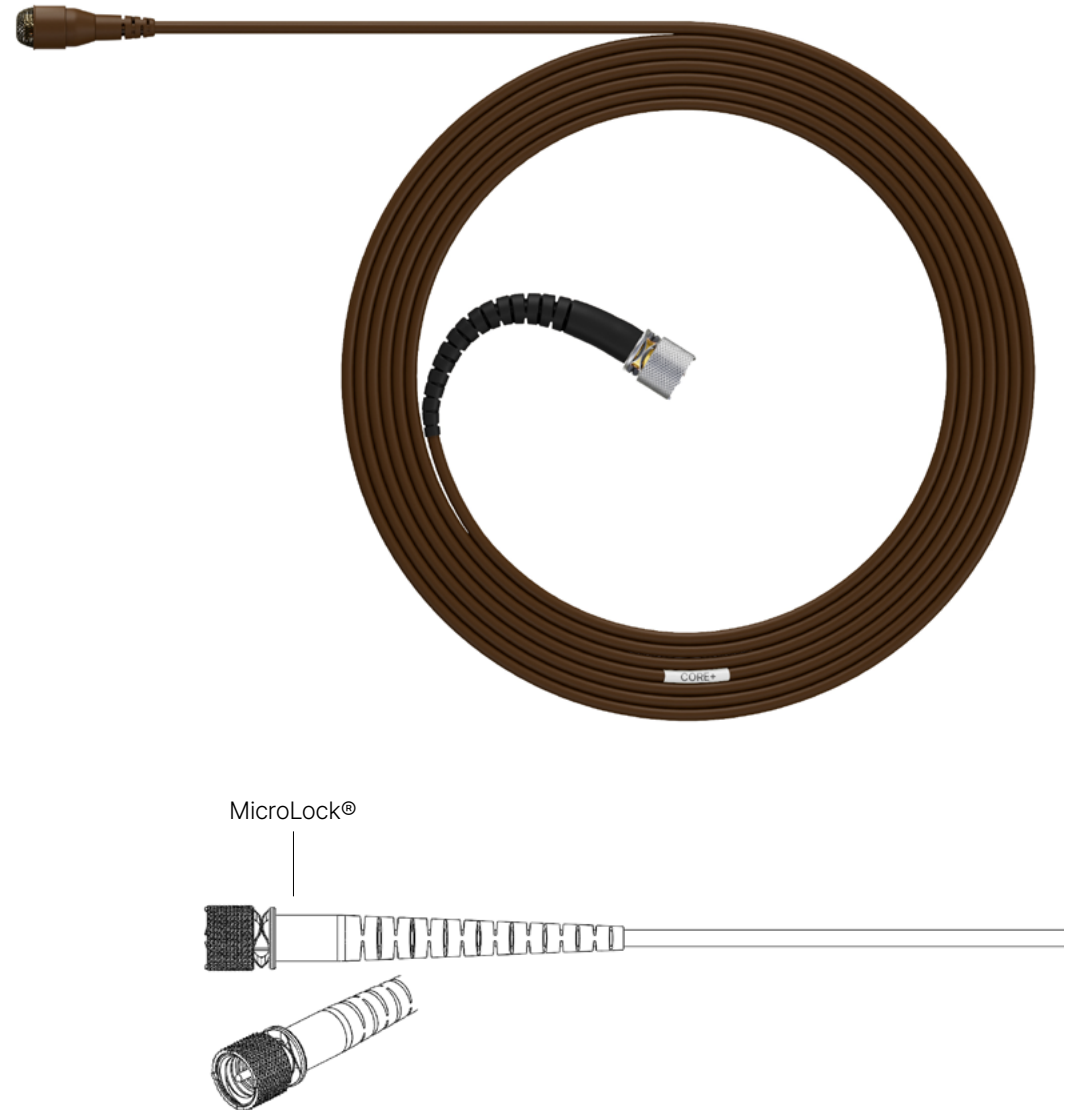

TECHNICAL SPECIFICATIONS

4060-OP-C-C90	
Directional pattern	Omnidirectional
Principle of operation	Pressure
Cartridge type	Pre-polarized condenser
Frequency response	20 Hz - 20 kHz
Effective frequency range ± 2 dB	Soft boost grid: 20 Hz - 20 kHz, 3 dB soft boost at 8 - 20 kHz. High boost grid: 20 Hz - 20 kHz, 10 dB boost at 12 kHz
Sensitivity, nominal, ± 3 dB at 1 kHz	20 mV/Pa; -34 dB re. 1 V/Pa
Equivalent noise level, A-weighted	Typ. 23 dB(A) re. 20 μ Pa (max. 26 dB(A))
Distortion, THD < 0.5%	128 dB SPL RMS, 131 dB SPL peak
Distortion, THD < 1%	129 dB SPL RMS, 132 dB SPL peak
Dynamic range	Typ. 109 dB
Max. SPL, THD 10%	134 dB SPL peak
Rated output impedance	30 - 40 Ω
Cable drive capability	Up to 300 m (984 ft) with DAD6001-BC XLR Adapter
Power supply (for full performance)	For wireless systems: Min. 5 V - max. 10 V through DPA adapter With DAD6001-BC: P48 (Phantom Power). Will work from 12 V
Current consumption	Typ. 1.5 mA (microphone). 3.5 mA with DAD6001-BC XLR Adapter
Connector	MicroLock®
Color	Brown
Weight	7.5 g (0.26 oz) incl. Cable and connector
Microphone diameter	5.4 mm (0.21 in)
Microphone length	12.7 mm (0.5 in)
Cable length	1.8 m (5.9 ft)
Polarity	Positively increasing sound pressure produces positive going voltage on MicroLock® pin
Temperature range	-40°C to 45°C (-40°F to 113°F)
Relative humidity (RH)	Up to 90%