




Type: 6066-OC-R-B34

ARCHITECT SPECIFICATIONS

The headset microphone shall feature a 3-point ear grip and a 2-way adjustable boom system (length and height). The headset shall include a 90° cable management system that safeguards the cable and direct it down the wearer's back. The headset microphone shall be a pre-polarized condenser type with an omni-directional polar pattern. The frequency response shall be 20 Hz to 20 kHz with an effective frequency range within ± 2 dB from 40 Hz to 20 kHz and with a 4 dB soft boost at 8 – 20 kHz. The sensitivity shall be 6 mV/Pa (-44 dB re. 1V/Pa) at 1 kHz within a tolerance of ± 2.4 dB. The equivalent noise level shall be 26 dB(A). The microphone shall not exceed 1% THD at 128 dB SPL peak. The microphone shall have a dynamic range of 102 dB. The Max. SPL (10 % THD) shall be 144 dB SPL peak. The rated output impedance shall be 30 – 40 Ω and the connector type shall be Mini-Jack. The cable length shall be 1.3 m with a cable diameter of 1.6 mm and in black color. The microphone diameter shall be 3.4 mm (0.13 in) and the length 8.9 mm (0.35 in). The microphone body, boom and detachable cap shall be made of stainless steel and coated with a black PVD treatment. The microphone shall be protected against water and dust to an IP58 rating and shall work in the temperature range -40° C to 45° C. The microphone shall function in humidity levels up to 90%. The polarity of the signal on the tip of the Mini-Jack shall be positive going for a positively increasing sound pressure.

The microphone shall be the DPA 6066 Omnidirectional Microphone type 6066-OC-R-B34

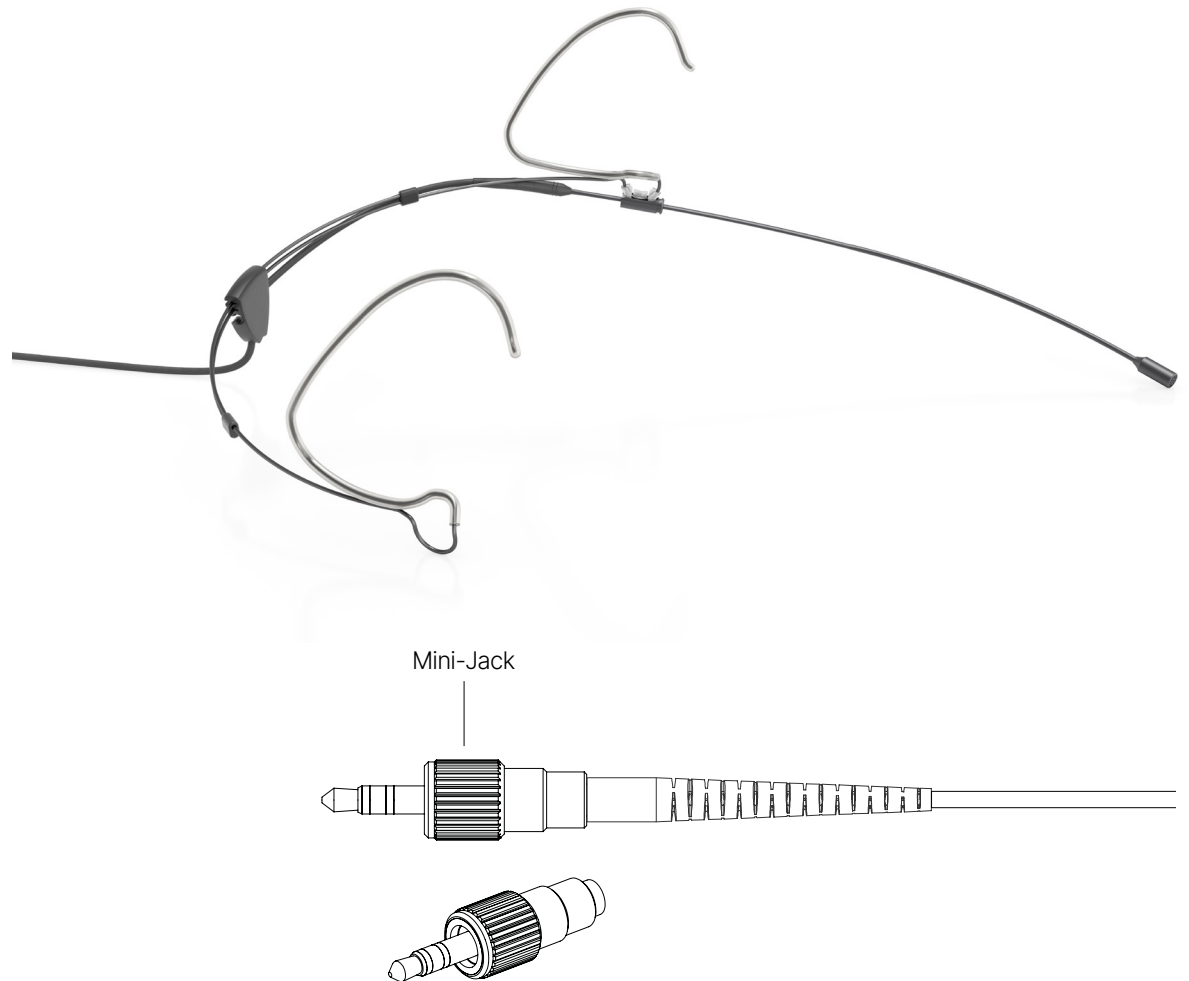

TECHNICAL SPECIFICATIONS

6066-OC-R-B34	
Directional pattern	Omnidirectional
Principle of operation	Pressure
Cartridge type	Pre-polarized condenser
Frequency response	20 Hz - 20 kHz
Effective frequency range ± 2 dB	40 Hz - 20 kHz with 4 dB soft boost at 8 - 20 kHz
Sensitivity, nominal, ± 2.4 dB at 1 kHz	6 mV/Pa; -44 dB re. 1 V/Pa
Equivalent noise level, A-weighted	Typ. 26 dB(A) re. 20 μ Pa (max. 28 dB(A))
Distortion, THD < 1%	125 dB SPL RMS, 128 dB SPL peak
Dynamic range	Typ. 102 dB
Max. SPL, THD 10%	144 dB SPL peak
Rated output impedance	30 - 40 Ω
Power supply (for full performance)	For wireless systems: Min. 5 V - max. 10 V
Current consumption	Typ. 1.5 mA
Connector	Mini-Jack
Color	Black
Weight	11 g (0.4 oz) incl. Cable and connector
Microphone head size (h x w x d)	3.4 / 8.9 mm (0.13 / 0.35 in)
Capsule diameter	3 mm (0.12 in)
Cable length	1.3 m (4.3 ft)
Polarity	Positively increasing sound pressure produces positive going voltage on Mini-Jack tip
Temperature range	-40°C to 45°C (-40°F to 113°F)
Relative humidity (RH)	Up to 90%